


Digital Signage

SHARP/ NEC MULTISYNC M551 AIRSERVER

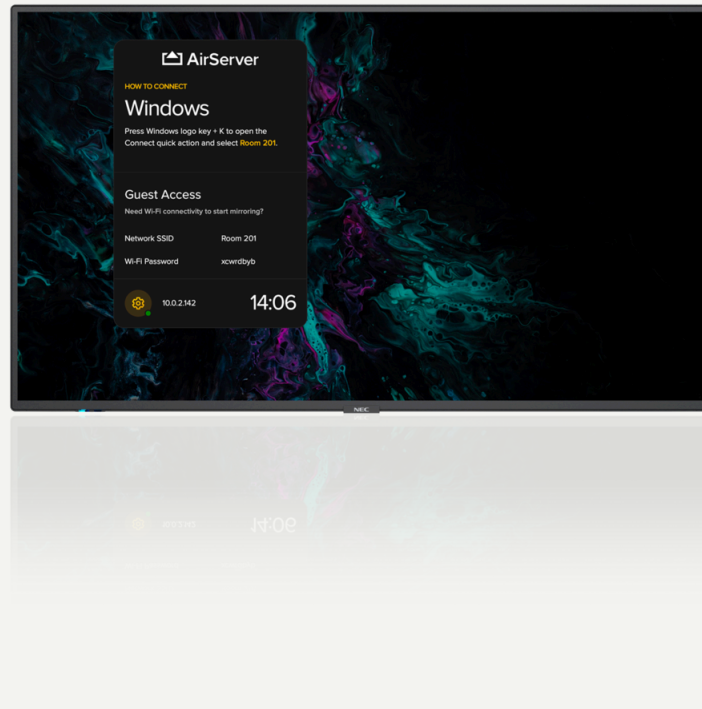

Perfect for meeting rooms and huddle spaces, the MultiSync AirServer models provide a sleek combination of intuitive screen sharing with professional display technology, supporting effortless collaboration.

- Modern and slim design – robust yet elegant allowing for an unobtrusive integration into any application and environment.
- Secure remote management – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources.
- Unhindered readability – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation.
- Mission-critical 24/7 ready operation – the selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- Future Ready Connectivity – featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

Määrittelyt

Lisävarusteet

[AVSpecificationAccessories]	Kauko-ohjaimen lähetin, Asennuksen määrittelyohje, Virtajohto, HDMI-kaapeli, Kiinnitysteline, Pöytälevyjälusta, Vaunujälusta, Paristo
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual
Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 toiminta sertifioitu	True
Rajoitettu valmistajan takuu (v)	3
Paikallinen himmennys	True
Sisäänrakennetut kaiuttimet (W)	10 + 10
Virranhallinta	True
Kaapin väri	Black
Lämpötila-anturi	True
Kirkkauden anturi	True
Jäännöskuvan pienennysominaisuus	True
Aikatauluttaja / Ajastin	True
Etähallinta	True
Tason säätö	True
SNMP	True
Käyttöjännite (ACV) / taajuus (Hz)	100-240
Käyttöjännite (ACV) / taajuus (Hz)	50-60
Virrankulutus (W) (Käyttö MAKS.)	110
Käyttölämpötila (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90
Lähetyslaatikon mitat (L/K/S) mm	1430
Lähetyslaatikon mitat (L/K/S) mm	920
Lähetyslaatikon mitat (L/K/S) mm	250
Tuotteen paino ilman jalustaa (Kg)	26
Lähetyspaino (Kg)	37
Näytön portti	1
HDMI	2
Audio 3,5 mm liitin	1
Bezel-koko (L/R) mm	13
Bezel-koko (U) mm	12
Bezel-koko (L) mm	16
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
[AVSpecificationConnectivityOutputAudio35MmJack]1	

AirServer Embedded Screen Mirroring Solution

Miracast	Android and Windows, extend Windows 10 desktop, Miracast over infrastructure, screen mirroring, touchback and pen support
Airplay	Code and password, extend macOS display, iOS, iPadOS and macOS, screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome, prompt security, screen mirroring and cast from apps with DRM
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	Provides new features and security enhancements
Paneelin tekniikka	IPS with Edge LED backlights
Alkuperäinen tarkkuus (Pikseliä)	3840 x 2160
Kuvasuhde	16:9
Taustavalon tekniikka	Edge LED
Kirkkaus (cd/m2)	500
Kontrastisuhte	8000:1
Vasteaika (harmaa harmaaseen ka) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1076 (10bit)
Maisema	True
Omakuva	True
Kiinnitys (VESA/kohtien lukumäärä/väli mm)	300 x 300 (FDMI)
Kiinnitys (VESA/kohtien lukumäärä/väli mm)	4
Kiinnitysruuvien tekniset tiedot (Koko/Maksimipituus)	M6
RS232C IN	1
LAN-portti	1
USB	1
Lävistäjän koko (tuumaa/cm)	55
Lävistäjän koko (tuumaa/cm)	139
Energiatähti	True
Haze Level [%]	28

